



RC SERIES WIDE ELECTRODE THICK FILM CHIP RESISTORS

CONSTRUCTION AND DIMENSIONS

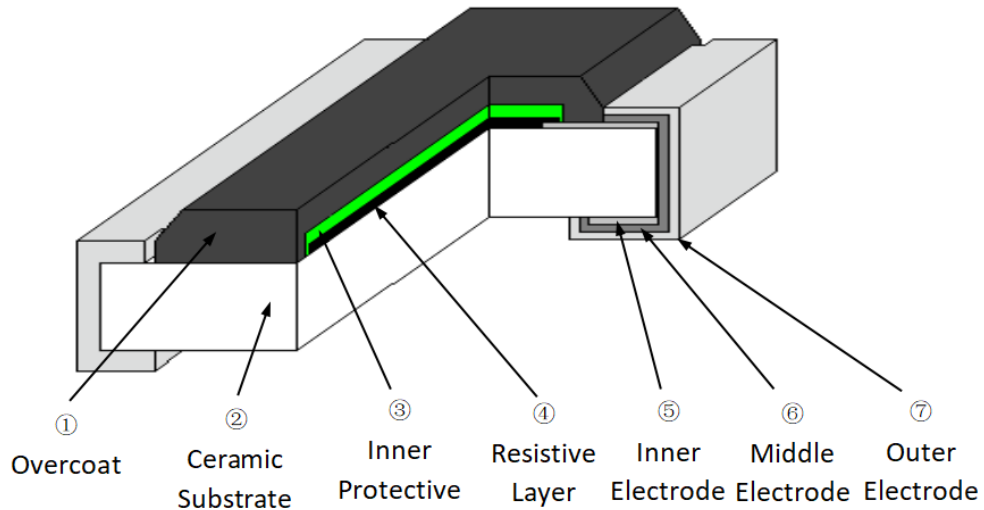

Outlines	Type	Dimensions (mm)				
		L	W	T	a	b
	RC1632 (0612)	3.10±0.15	1.60±0.15	0.55±0.15	0.18±0.15	0.40±0.15
	RC3263 (1225)	6.30±0.15	3.10±0.15	0.55±0.15	0.50±0.25	0.60±0.25

POWER RATING AND DERATING

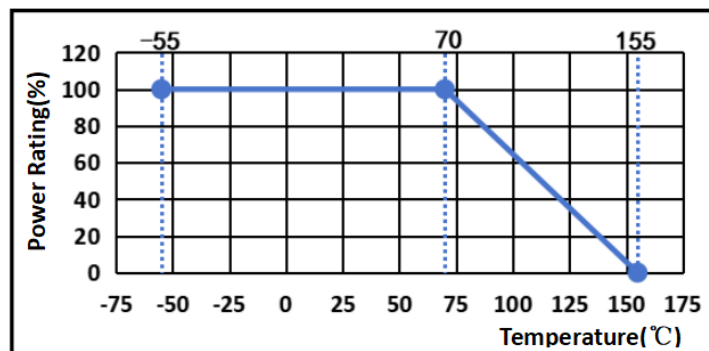

Rated Voltage: $E = \sqrt{K \times N}$ or max. working voltage whichever is lower

Where

E=Rated Voltage(V)

P=Rated Power(W)

R=Resistance Value(Ω)

SPECIFICATIONS

Type	Power Rating @70°C	Max.Working Voltage	Max.Over-Load Voltage	T.C.R (×10 ⁻⁶ /K)	Resistance Range(Ω)	Tolerance
RC1632 (0612)	3/4W	200V	400V	-200~+500	1Ω≤R<10Ω	F: ±1% G: ±2% J: ±5%
				±100、±300	10Ω≤R≤1MΩ	
RC3263 (1225)	3W	200V	400V	-200~+500	1Ω≤R<10Ω	
				±100、±300	10Ω≤R≤1MΩ	

PART NUMBERING CODE

RC1632	K	1002	F	T
Series	T.C.R (×10 ⁻⁶ /K)	Resistance	Tolerance	Packing
RC1632 RC3263	K: ±100ppm/°C M: ±300ppm/°C N: (-200~+500) ppm/°C	E-24 series E-96 series	F: ±1% G: ±2% J: ±5%	B: Bulk T: Tape Reel